

ByGo[®]

Car seat



Assembly Instructions

Conforms to ECE 44.04

To ensure that your car seat is used in accordance with these instructions, please read them fully. This car seat conforms to ECE 44.04 and is guaranteed for 12 months from the date of purchase against manufacturing defects. Your child's safety may be affected if you do not follow these instructions. This car seat is intended to carry child from birth up to a maximum weight of 13kgs.

WARNING: Please read thoroughly before commencing installation as an incorrect installation could be dangerous.

WARNING: Parents should not under any circumstances use this child restraint on a passenger seat equipped with an activated airbag. However, if you need to install the seat in the front passenger seat, please ensure that the airbag is deactivated.

WARNING: The child seat must only be installed in the rearward facing position.

WARNING: Never use the child seat without fastening it into the car as described in these fitting instructions, if the shoulder height is not ok, please re-install the seat again.

WARNING: It is most important that the seat belt is correctly routed and the child seat tightened down on the upholstery as firmly as possible to ensure maximum protection, a recommended method is shown in these instructions.

WARNING: Do not add to or modify this product in any way.

WARNING: Never use this product if it has been in an accident, or if it has become badly worn. Periodically inspect the harness for wear, paying particular attention to attachment points, stitching and adjusting devices.

WARNING: Do not leave a child unattended in the seat at any time.

WARNING! Ensure that no part of the seat or seat belt is trapped in a door or a folding seat. If your car has a folding rear seat, ensure that it is correctly latched in its upright position.

WARNING! Car interiors can become very hot when left standing in direct sunlight, it is therefore recommended that the child seat, when not in use, is covered by a towel etc. This prevents components, particularly those attached to the child seat, becoming hot and burning the child.

WARNING! In the event of an emergency it is important that the child can be released quickly. This means that the buckle is not fully tamperproof and therefore your child should be persuaded never to play with the buckle.

WARNING! Luggage and other heavy objects should be secured in the car. Loose objects are liable to cause injury in the event of an accident.

WARNING! The child seat must not be used without the cover.

WARNING! We use PU and EPS foam under the cover. Do not remove the integral foams, do not push or pull too hard against the foams.

WARNING! Never place your child seat on a table or work surface, if your child is seated in the seat.

WARNING! This seat can be used for children of 0-13kg in weight and is used in conjunction with a 3 point lap and diagonal safety belt in the rear-facing position only.

WARNING! When the child seat is not in use, it is recommended that it is fastened into the car with a seat belt to avoid injury in the event of an accident.

WARNING! In an emergency your child can be released quickly by pressing the red release button on the harness buckle

WARNING! Store this child seat in a safe place when it is not being used. Avoid placing heavy objects on top of it.

WARNING! If you travel with passengers using both the front and rear passenger seats, the lighter occupants should be in the rear and the heavier occupants in the front of the vehicle.

WARNING! Do not allow your child seat to come into contact with corrosive substances e.g. battery acid.

WARNING! Do not leave the child seat with a child in it on a raised surface, such as a table work top, bed or shopping trolley, due to the risk of falling.

WARNING! The manufacturer can only guarantee the safety of the seat if it is used by the original owner.

WARNING! We strongly advise against using a second-hand product, as you can never be sure of its history.

WARNING! Always check to make sure the seat fits in your car properly before purchasing it.

WARNING! This seat can not be used as a rocker in house.

WARNING! Do not use this child seat in the home, it has not been designed for home use.

WARNING! Do not use this child seat longer than 5 years, the quality of material may change with ageing.

WARNING! Always make sure the seat is properly attached when used on a stroller as a travel system. Failure to attach properly could result in serious injury or death to your child.

WARNING! When the seat is attached to the chassis of a stroller, the combination should never be lifted up by the car seat.

WARNING! Always remove your child from the seat while making adjustments to the stroller and / or the car seat.

WARNING! Always make sure the carrying handle is in the carrying position before carrying.

WARNING! If any doubt, consult either the child restraint manufacturer or the retailer.

IMPORTANT: RETAIN FOR FUTURE REFERENCE. READ CAREFULLY

Tutti Frutti Direct Ltd. Unit 3, 1000 North Circular Road, London, UK, NW2 7JP

t: +44 (0) 208 368 5800

e: customerservice@tuttibambini.co.uk

www.tuttibambini.com

Hello,

Congratulations on your new arrival!

We're so pleased that you have chosen our BYGO® car seat for your baby.

Please take a few moments to read this guide on how to use the BYGO® correctly so you can rest assured that your little one is safe and secure in their car seat.

Wishing you the best of luck on your new journey,

Team Tutti

The ByGo® Group 0+ car seat offers optimum safety and comfort all in one. Suitable from birth up to approx. 12 months, the ByGo® features side impact protection as well as a padded reversible head hugger for total comfort. It also includes a padded foot cover to provide extra warmth and a retractable hood, providing protection from the sun wind and rain.

It is extremely easy to install, whether using just a seatbelt or an ISOfix base. All of the car seat fabrics are machine washable, making it easy to clean off spills and stains.


ByGo® is available in five different colour ways, allowing you full customisation to suit your style. It combines perfectly with the ARLO® and KOJI® pushchairs by Tutti Bambini to create a fully functional travel system.

Features:

- Suitable from birth up to 13kg's (approx. 12 months)
- ISOfix compatible
- Can also be installed in car with 3-point seat belt
- Soft goods made from a water and oil repellent melange fabric
- Foot cover is lined with a soft marl fabric
- Reversible head hugger & foot cover included
- 3-point safety harness
- Compatible with the ARLO® and KOJI® Pushchairs
- Rain cover included

Your Bygo[®] Car Seat

Contents

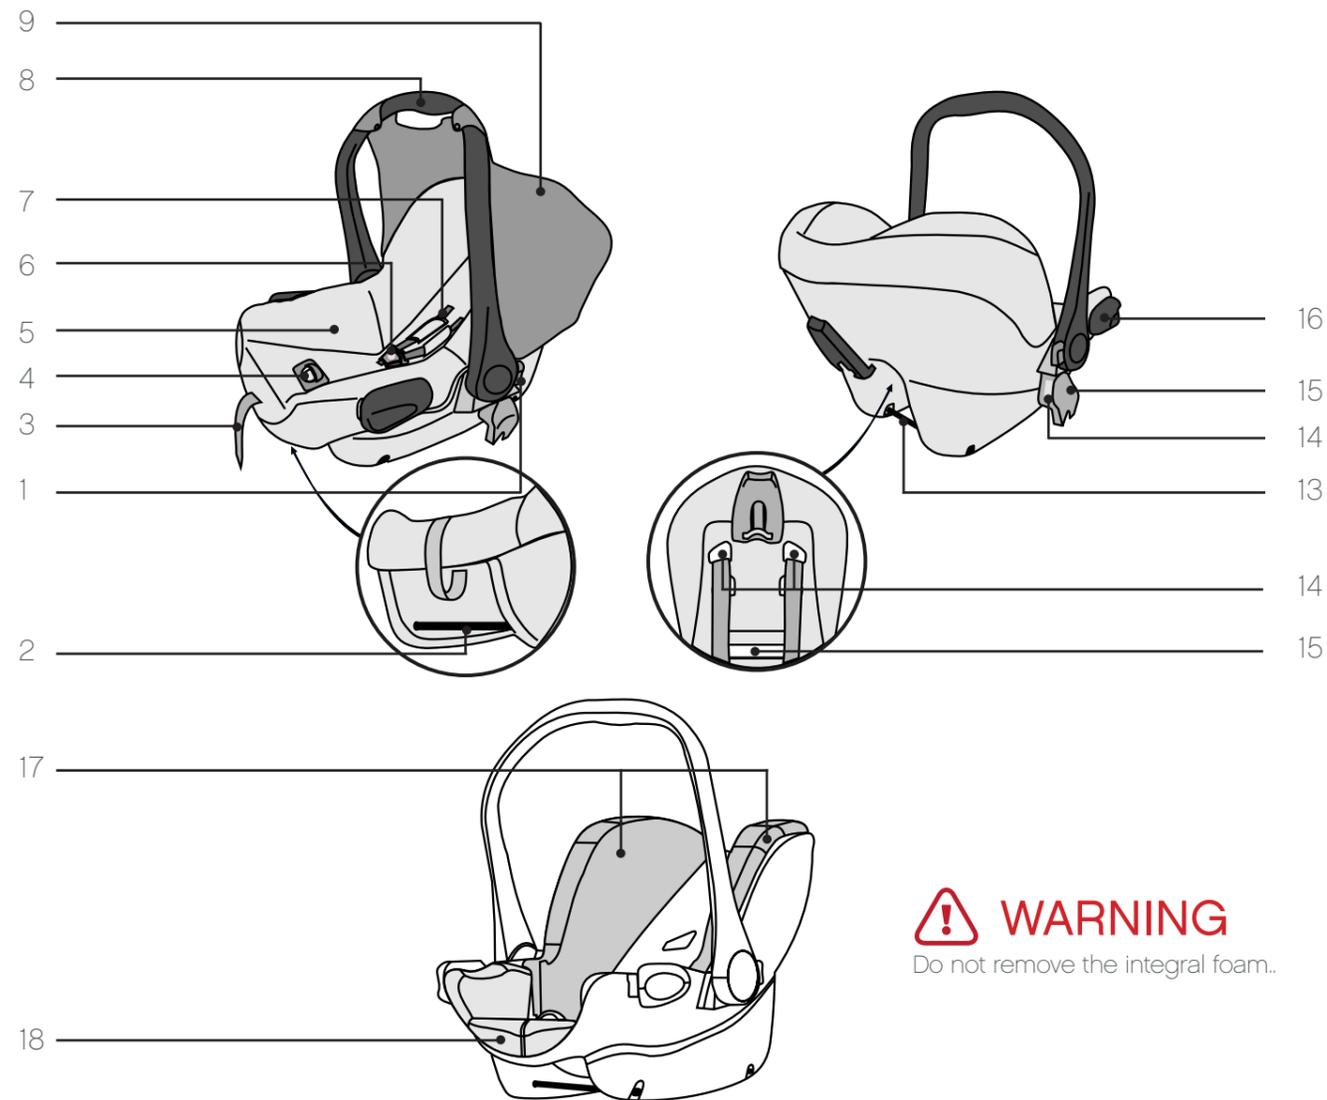

- 1. Red button handle adjuster
- 2. Metal bar (optional)
- 3. Harness adjuster strap
- 4. Harness adjuster
- 5. Cover
- 6. Harness buckle
- 7. Shoulder straps
- 8. Carry handle
- 9. Canopy

- 10. Dark blue diagonal belt guide
- 11. Shoulder harness slots
- 12. User guide storage pocket
- 13. Metal bar (optional)
- 14. Red switch (optional)
- 15. Coupler (optional)
- 16. Light blue lap belt guide
- 17. PU foam
- 18. EPS foam


! WARNING
Do not remove the integral foam..

Adjusting the shoulder straps	6
The harness	7
Correct shoulder height	9
Fitting your car seat	10
Installation	12
Adjusting the handle positions	14
Using with a travel system	15
Care and maintenance	16
Notes	17


Adjusting the Shoulder Straps

1. Open the harness Buckle

Press the red release button.

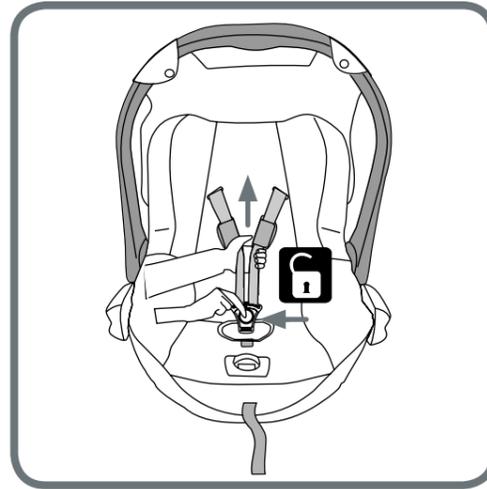


Place your baby in the car seat.

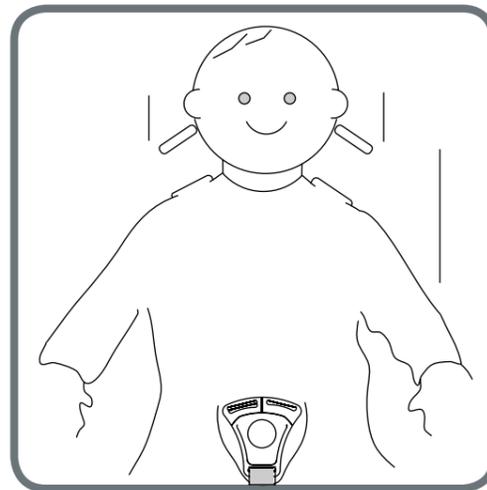

Put the shoulder straps over the shoulders of your baby.


Caution: do not twist or interchange the shoulder straps.

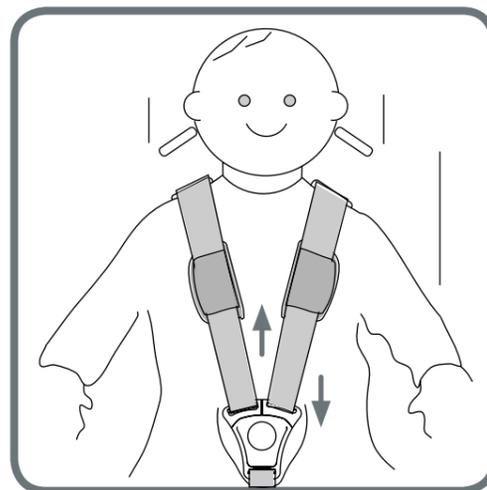

The Harness


1. Fastening the harness

Slot the two plastic sections of the buckle connectors together.

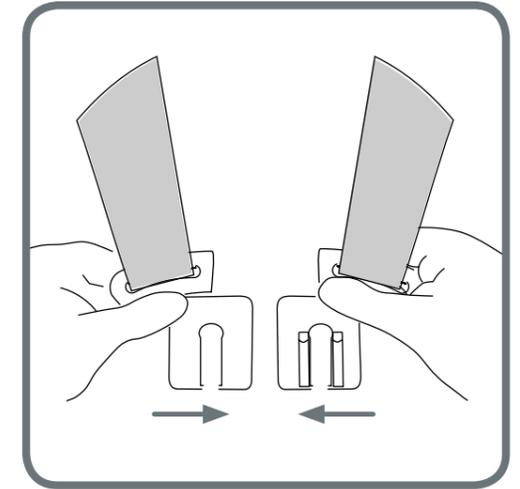


Slot the two connectors into the hole in the top of the buckle until they 'click' into place.

Caution: Put the two buckle tongues together and engage in the harness buckle with an audible click! click!

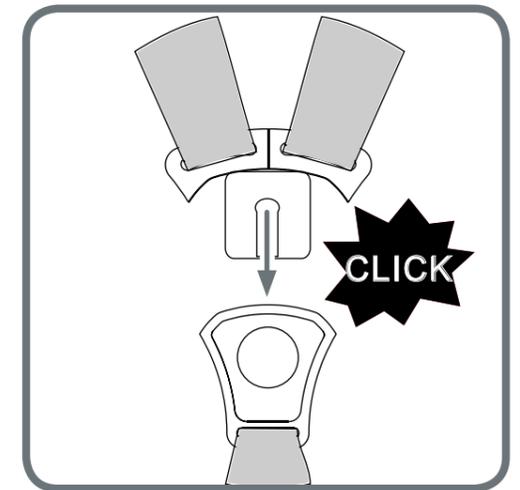

Always check the harness is correctly locked by pulling above and below the buckle.

Caution: Tighten the straps until they are in contact with your baby's body. The hip belt must lie as low as possible over your baby's hips.

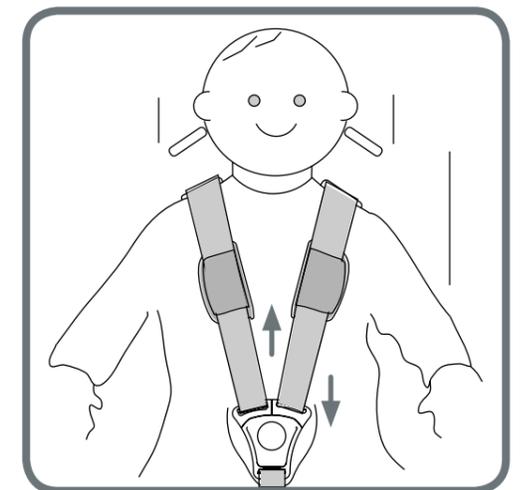

The Harness


The harness should be adjusted as tightly as possible without causing discomfort to the child. A loose harness is dangerous and should be checked each time that you use the seat. To tighten the harness, pull down on the adjustment strap until the harness is the correct tightness.

Caution: Pull on the adjusting straps until the harness lies flat and is in contact with your child's body. Pull out the adjusting strap straight. There should never be more than one finger's width of space between the shoulder straps and your child's shoulders.

The harness is loosened by pulling on both straps at the same time press down on the harness adjuster.

2. Unfastening the harness


To release the harness, push the red button in the middle of the harness buckle inwards. You can now lift your child from the seat; ensure that the buckle connectors do not catch on clothing.

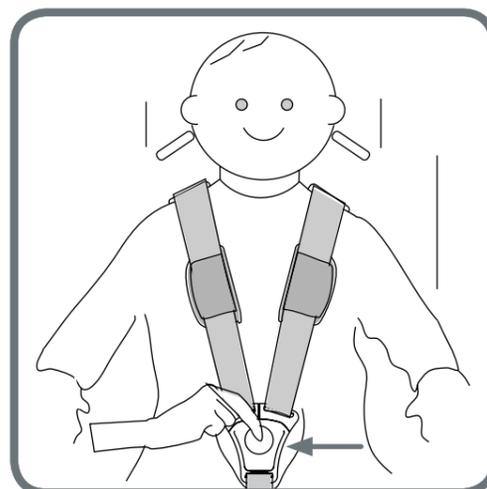

Correct Shoulder Height

1. Before the car seat is installed in the vehicle

The harness has 2 positions. The straps should go in to the slots at, or nearest slots above the height of the child's shoulders. To adjust the harness, remove each strap by passing it through the slots from the front to the back of the seat; re-route the straps through the appropriate slots. If the shoulder height is not ok, please re-install the seat again.



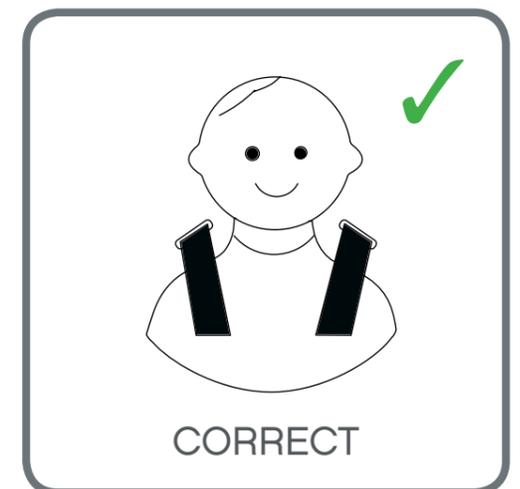


Fitting Your Car Seat

1. The type of approved seat belt you must have

Your child seat can only be installed rearward facing using a lap and diagonal seat belt in the front or rear passenger seat of the car.

Only suitable if the vehicle is fitted with 2-point static, 3 point retractor safety belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

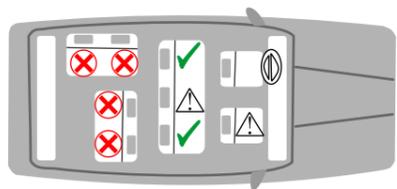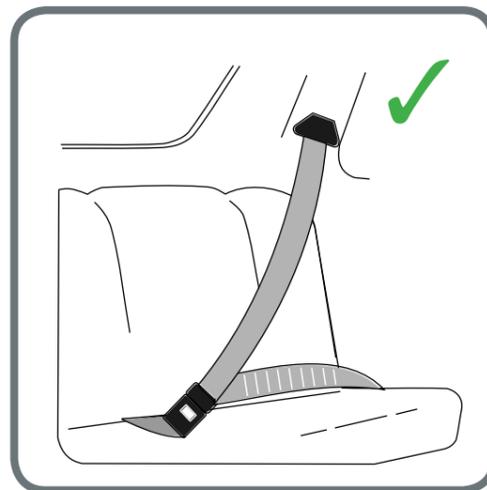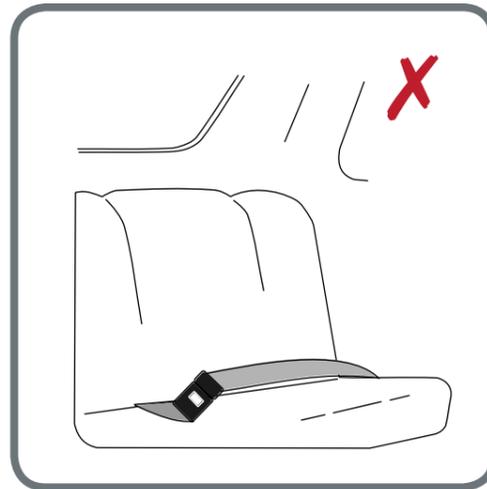

✓	On outer rear seat	YES
⚠	On front passenger seat without front airbag	YES
⚠	On centre rear seat with 3-point belt	YES
✗	On a rearward-facing seat	NO
✗	On seats facing sideways	NO


Correct Installation

1. Installation of the car seat


Push the child seat facing rearward firmly against the backrest of the cars seat.



Route the lap section of the adult safety belt through the lap belt guides and fasten it into the buckle until you hear a 'click'.

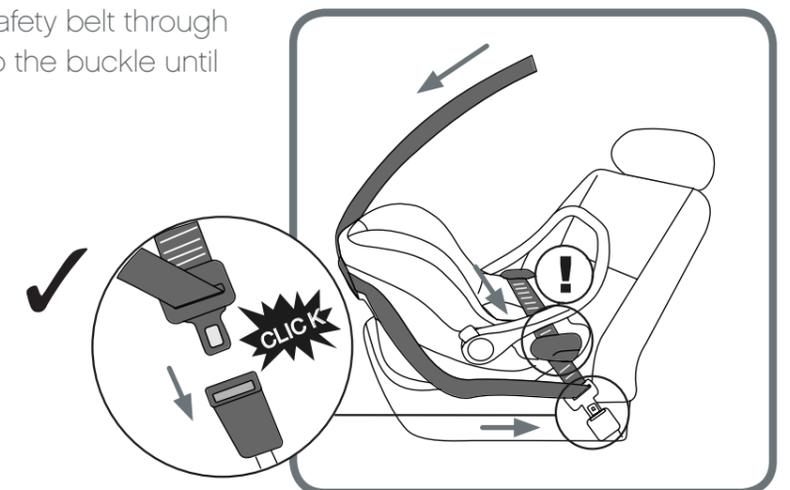

Place the diagonal belt in the diagonal seat belt guide at the back of the seat

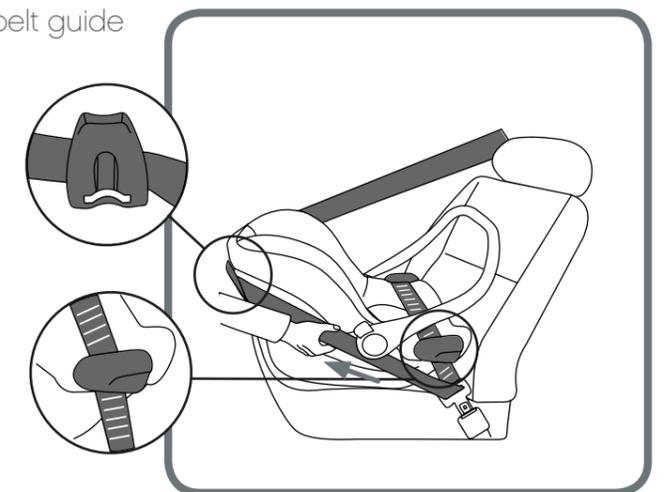


Installation

Take out all the slack in the seat belt, ensuring that there are no twists or kinks in the seat belt.




Warning: Make sure the car safety belt buckle runs in a straight line and stays below the belt hook.

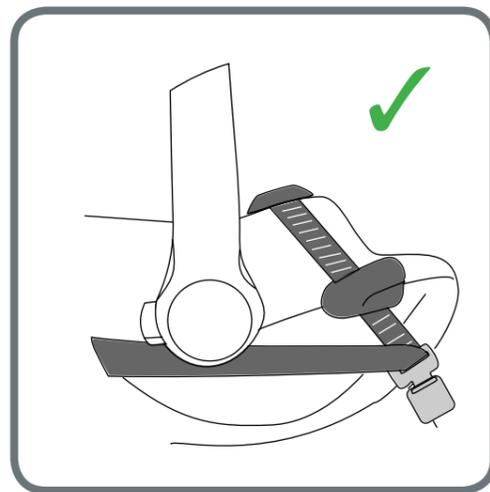

Installation

1. Ensure the car seat is correctly installed by checking the following

- The straps of the child safety seat are close to the body without constricting the child
- The shoulder straps are adjusted correctly
- The straps are not twisted
- The tongue from the adult seat is engaged correctly into the buckle from the vehicle

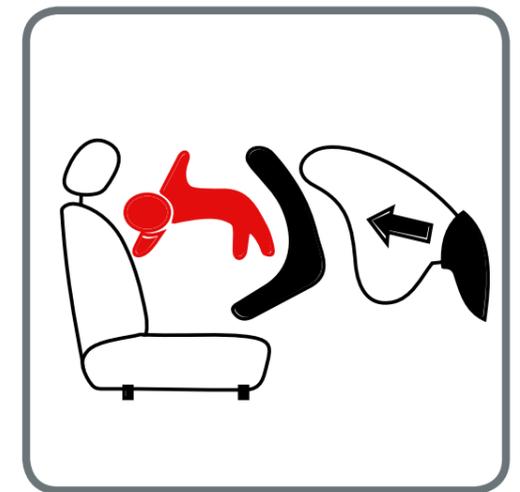

WARNING

In an accident, enormous forces occur. Never try to secure a child on your lap with the vehicle seat belt or by holding onto them.

Secure your child in the car seat for every journey.

Always secure the baby seat onto the vehicle seat in a rearward facing position.

WARNING

An airbag hitting the baby seat can cause serious injury to your child, possibly resulting in death.

Do not use on a passenger seat with an activated airbag. However, if you need to install the seat in the front passenger seat, please ensure that any airbag is deactivated.

For seats with side airbags, please observe the instructions in your owner's manual.

Adjusting the Handle Positions


1. Adjusting handle positions

To adjust the handle from one position to another, pull out both sides of the handle on the swivel point; rotate the handle forwards or backwards into the desired position.

The carry handle has 3 positions.

Ensure the handle is straight when carrying the car seat.


Always ensure that the handle is locked in position until you hear a 'click' and that the harness is correctly fitted and the buckle fastened before lifting your car seat.

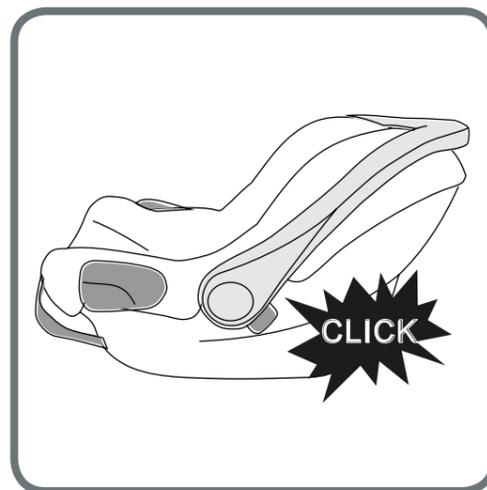


As a Travel System

1. Fitting the car seat to the chassis

First place the car seat adapters (supplied with the car seat) onto the chassis, with the arrows facing the direction that you want to place the car seat. The yellow markers on the adapters should face inwards.

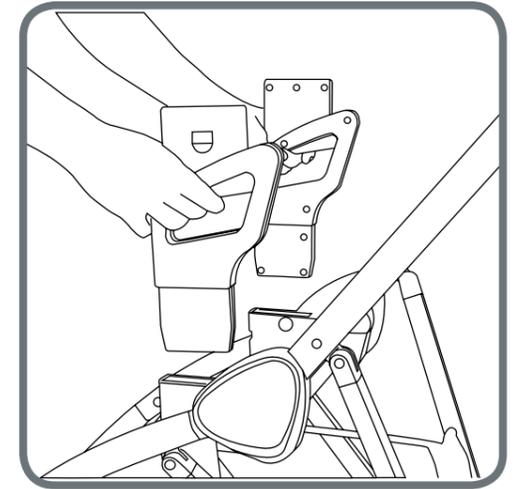


Then lower the car seat onto the adapters until they click into place.

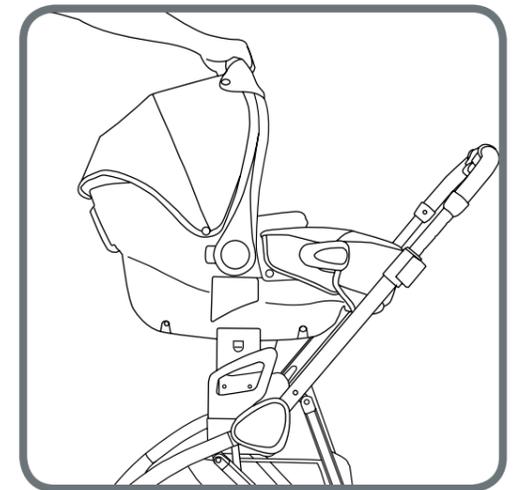


2. Removing the car seat from the chassis

Press the two buttons on the car seat adapters inwards.

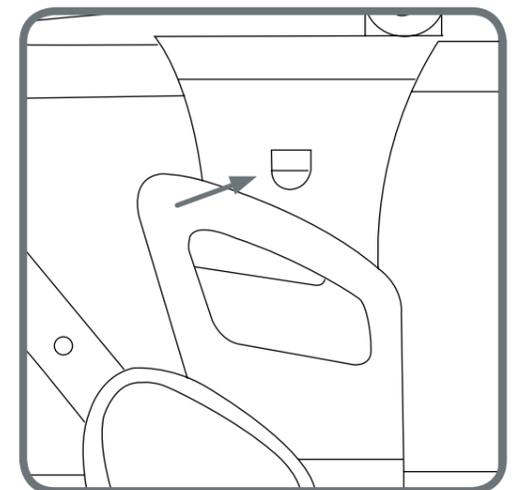


As a Travel System

Lift the car seat upwards from the handle.

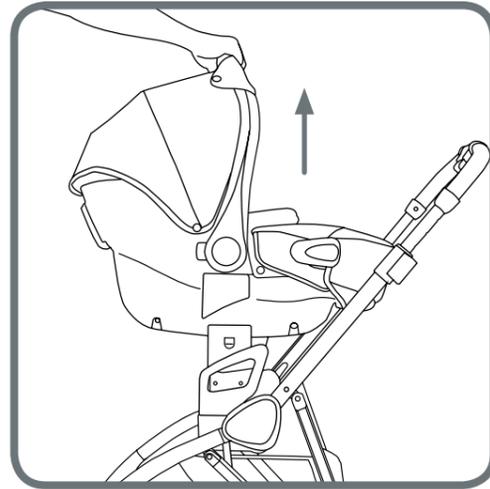

The car seat adapters can be removed from the chassis by squeezing the handles and lifting off.

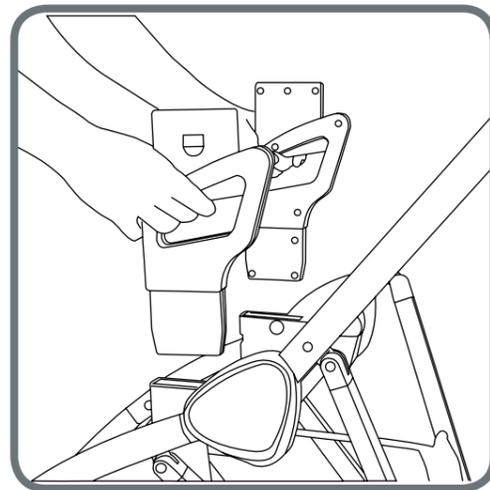

Care and Maintenance

Cleaning the shell

Use a damp cloth to clean the main body shell.

Cleaning the belt lock and harness

Use only a mild hand soap and warm water. Do not use chemical cleaners and never attempt to bleach or dye webbing.

Allow to dry naturally.

Cleaning the seat cover

The cover should only be hand washed and follow instructions when washing.



Hand wash only



Do not dry clean



In water below 30°



Do not iron



Do not use bleach / chlorine



Use only a mild hand soap

Warning

Do not use undiluted neutral detergent, gasoline or other organic solvents to clean the main body. Otherwise damage may be caused to the main body.

Environment

Keep all plastic packaging materials out of reach of your child to avoid the risk of suffocation.

For environmental reasons, when you have stopped using this product, we ask that you dispose of the product in the proper waste facilities in accordance with local legislation.



Join Us



Follow us on Facebook
TuttiBambiniUK



Follow us on Twitter
TuttiBambiniUK



Follow us on Instagram
TuttiBambiniUK

www.tuttibambini.com